

FEATURES

- Stackable for higher power or 3-phase
- Unique overload protection
- Remote programming

1350 VA OF AC POWER IN A 3.5" HIGH CHASSIS

In the BL1350 Series you'll find the quality features you expect from Behlman. Fully adjustable voltage and frequency, low output THD, high efficiency, plus excellent line and load regulation. There's also a unique overload protection system that folds back voltage to maintain rated current without output waveform distortion. Units are supplied with analog remote control and available with optional RS-232 and IEEE-488 remote control interfaces. Other options include

INPUT 85 – 270 VAC, 47-63 Hz
Other frequencies are available
Isolation: Yes
Input to Output

OUTPUT
Power: 1350 VA
Units can be stacked for increased power, or 2- or 3-phase output
Voltage: 0-135 V or 0-270 V
Resolution: 1 V
Accuracy: +/- 2 % of full scale
Contact factory for additional voltages
Frequency: 45-500 Hz (Option E: 45-1000 Hz)
Resolution: 1 Hz
Accuracy: +/- 2 Hz
Current: 10 Amps, 0-135 V Range,
5 Amps, 0-270 V Range
Resolution: 0.1 Amp, +/- 1 digit
Accuracy: +/- 2 % of full scale
Crest Factor: 3 : 1
Power Factor: 100% of rated output into any
power factor load
Distortion: 0.5% THD typical, measured at full load,
100 Volts, 50 Hz
Line Regulation: +/- 0.1% for +/- 10% line change
Load Regulation: +/- 0.7%, no load to full load
Efficiency: 80% typical

PROTECTIVE CIRCUITS

Input: Fast-acting main circuit breaker
Constant Current: Overload automatically causes voltage fold-back to provide maximum current without distorting output waveform



extended frequency range out to 1000 Hz and motor test option, which has the capability to soft-start motors, pumps and compressors, thereby eliminating the need for high-power devices.

Small size, quiet operation and high efficiency make the BL1350 Series ideal for industrial product testing, precision avionic test, power conversion, ATE, bulk power and motor generator replacement.

Short Circuit: Short-circuit overload electronically latches output open to protect load... power restored by recycling circuit breaker
Thermal: Internal temperature sensor prevents heat damage

CONTROLS / INDICATORS

Power On/Off: Circuit breaker
Meter: DMM: True RMS Volts, True RMS Amps, Frequency
Volts adjust: Ten-turn pot to adjust voltage
Frequency adjust: Ten-turn pot to adjust Frequency
Meter select switch: Volts, Amps, Frequency
Indicators: Constant Current, Overtemp, Overload Latch
Phase adjust: Potentiometer (pot)
Output On/Off: Toggle switch
Range: Hi/Lo Switch
Binding post: Hot, Neut, Gnd
Remote Control: 0-10 VDC programming for voltage and frequency... contact closure for Output On/Off and range change
External Synch: Synchronizes AC output with external input

MECHANICAL & ENVIRONMENTAL

Dimensions: High-strength 19" (48.3 cm) rack mount chassis,
3.5"H X 22"D (8.9 cm X 55.9 cm)

Weight: BL1350B-1 & pf: 45 lbs (20.43 kgs),
C-2 & C4: 70 lbs (31.78 kgs)

Operating Temperature: 32° to 131° F (0° to 55° C)

Input Connections: Barrier strip on rear

Output Connections: Binding posts on front and barrier strip on rear

PWM In/Out: Barrier strip on rear

External Synch: Barrier strip on rear


Remote control: DB-9 connector

OPTIONS: *Contact factory for additional options*

A: Safety sockets
B: Rubber feet
E: Extended frequency range, 45-1000 Hz
L: Locking pot
MT: Motor Test available on model B-1, C-2 and C4...see below
R: Ruggedization
S: Slides

OPTION MT: MOTOR TEST includes all of the specifications of the standard BL Series plus the following features to meet the requirements for motor testing:

- Unique overload protection prevents output distortion
- "Soft Start" allows starting motors in "locked rotor" condition by folding back the voltage and slowly increasing it as the motor starts to accelerate
- Capable of starting motors, which normally requires 140 Amps locked rotor starting currents
- Capable of supplying a running current up to 14 Amps at 50% duty cycle.

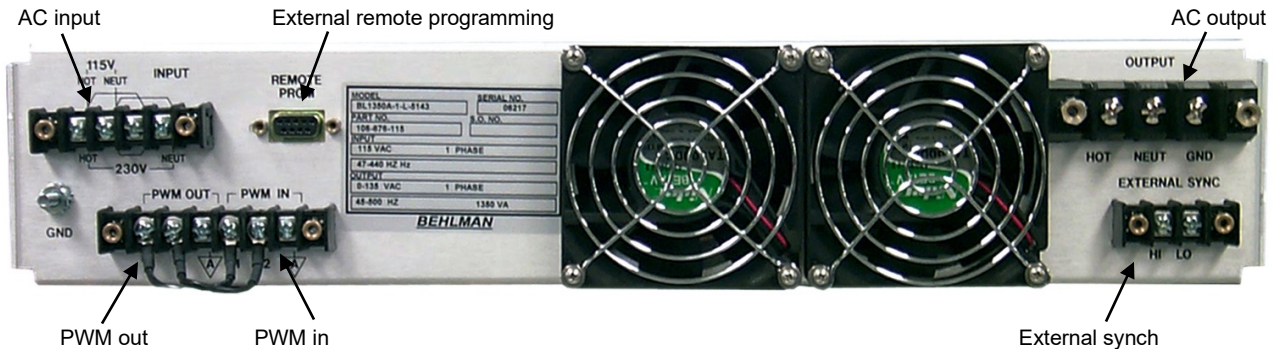

Rear View

The BL1350 Series is easily modified to meet your requirements



www.behlman.com

ORBIT POWER GROUP
Behlman Electronics

Headquarters:
80 Cabot Court, Hauppauge, NY 11788
631 435-0410 800 874-6727
Fax: 631 951-4341

sales@behlman.com

