

FEATURES

- Developed in Alignment with the SOSA™ Technical Standard
- Wide Input Range
- High Power DC Outputs
- High Efficiency
- Conformal Coating on PCB
- Remote Sensing on Main Output
- Load Sharing on Main Output
- Redundancy on All Outputs
- VITA 46.11 Compatible IPMC for System Management



6U VITA 62.0 High Power Dual Output Power Supply

The Behlman VPXtra®1000CD5-IQ1 COTS DC to DC power supply is a rugged, highly reliable, switchmode unit built for high-end industrial and military applications. The VPXtra®1000CD5-IQ1 is a 6U VPX power supply that operates from a 28 VDC input IAW MIL-STD-704E and delivers up to 1050 Watts of DC power via two outputs. The +12V output can be paralleled with other VPXtra®1000CD5-IQ1 power supplies for higher power and redundancy. The VPXtra®1000CD5-IQ1 also contains a VITA 46.11 compatible IPMC for integration with system management functions.

The VPXtra®1000CD5-IQ1 power supply has no minimum load requirement and has overvoltage and short circuit protection as well as over current and thermal protection. The power supply is designed to support the rigors of mission critical airborne, shipboard, vehicle and mobile applications.

Designed and manufactured with *Xtra-Cooling* technology, *Xtra-Reliable* design and *Xtra-Rugged* construction, Behlman's VPXtra®1000CD5-IQ1 is the best choice for your power supply needs.

INPUT

Voltage: 18 to 36 VDC

OUTPUT

Power: 1050 Watts maximum †

Voltage/Current:

PO1/PO2/PO3: +12 VDC @ 83.3 Amps

Auxiliary: +3.3 VDC @ 15 Amps

Line Regulation: 0.25% max

Load Regulation: 0.25% max (+12V output)

0.75% max (3.3V_AUX output)

PARD-Ripple & Noise: 120 mV p-p (+12V output)

50 mV p-p (3.3V_AUX output)

20 MHz Bandwidth

Efficiency: 90% typical,
50 – 100% of Load Power

PROTECTIVE CIRCUITS

Over Voltage: 125% typical

Over Current: 150% typical (+12V output)
120% typical (3.3V_AUX output)

Short Circuit: Automatic Recovery

Over Temperature: Shutdown w/Auto Recovery

CONTROLS

INHIBIT*: Output Off - active low

ENABLE*: Input On - active low

(IAW VITA 62.0)

INDICATORS

DC IN OK: Green

DC OUT: Green

OUT FAULT: Red

TEMP FAULT: Yellow

WE: Yellow

SYSTEM MANAGEMENT

VITA 46.11: IPMC ‡

I2C Reporting: Dual Bus (IPMB-A, IPMB-B)

Reports: Input and Output Voltages

Input and Output Currents

Internal Temperature (3 places)

† Power derating may be required based on temperature.
Consult product data sheet for details.

‡ Consult product data sheet for details.

GENERAL CHARACTERISTICS

Isolation:

Input to Output: 500 VDC
 Input to Case: 500 VDC
 Output to Case: 500 VDC

MTBF: 273,939 hrs G_F @ 50°C,
 IAW MIL-HDBK-217F Notice 2

MECHANICAL (1.0 inch pitch)

See O&C drawing [OC94078-12] for connector details and pin assignment

Dimensions: 9.18"L x 6.63"W x 0.97"H
 Weight: 3.8 lbs. maximum
 Input Connector: P0, TE P/N: 6450833-7
 Output Connector: P1, TE P/N: 6450839-6

ENVIRONMENTAL COMPLIANCE

(IAW VITA 47.1 Class ECC4SL1)


Temperature

Operating: -40°C to +85°C
 Storage: -55°C to +105°C

Designed to meet the following:

EMI: MIL-STD-461G (Aircraft)
 external filter required
 Shock: VITA 47.1 Class OS2
 Vibration: VITA 47.1 Class V3
 Humidity: VITA 47.1, up to 95% RH
 Altitude: -1,500 to +60,000 ft.
 Salt Fog: VITA 47.1, Class SL1

For more detail, see VPXtra[®] 1000CD5-IQI Data Sheet

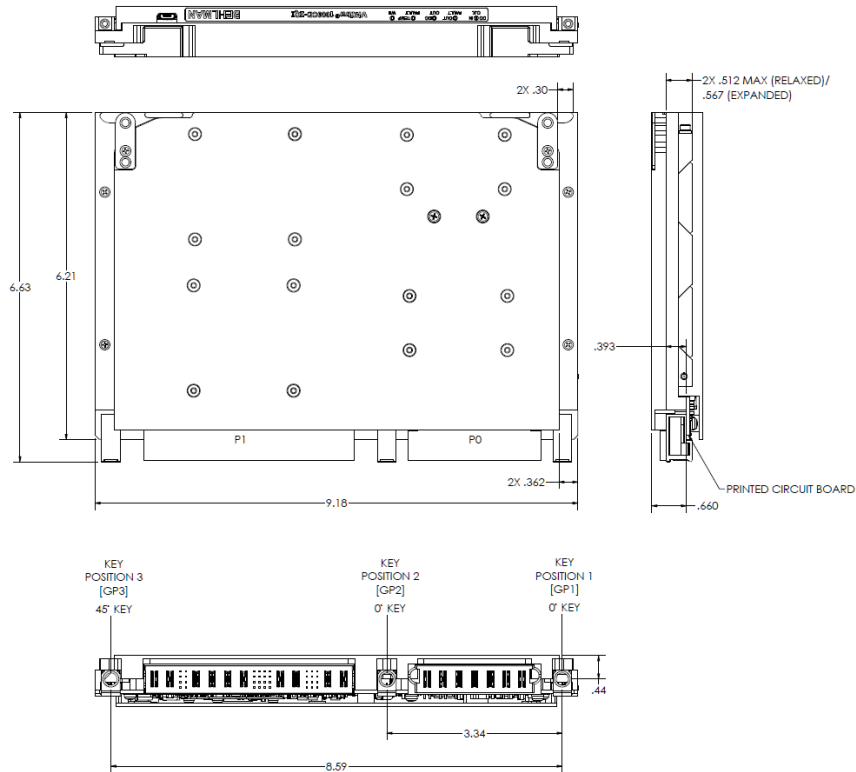

VITA Member

VPXtra[®] is a registered trademark of Behlman Electronics.

The VPX logo and related marks are trademarks of VITA.

SOSA[™] and logo design and The Open Group Certification Mark[™] are trademarks of The Open Group in the United States and other countries.



www.behlman.com

ORBIT POWER GROUP
Behlman Electronics

Headquarters:
 80 Cabot Court, Hauppauge, NY 11788
 631 435-0410 800 874-6727
 Fax: 631 951-4341

sales@behlman.com

